

MODEL VTM

The VTM is used in conjunction with the VorTek G3 Transmitter to provide a local airflow volume display and USB communication port which connects directly to the VorTek G3 Transmitter. The VTM is offered with standard cable lengths up to 100' to ensure the VTM can be mounted in a convenient location that is easily accessible. The VTM is provided with 2 mounting screws for securing to a standard single-gang electrical box.

VTM-□□□-□

CABLE LENGTH

- 25' Cable = **025**
- 50' Cable = **050**
- 75' Cable = **075**
- 100' Cable = **100**

CABLE TYPE

- Blank** = Plenum Rated, for use with Standard Transmitter
 - N** = Waterproof Cable, for use with NEMA 4 Transmitter
- NOTE: VTM is not NEMA 4 rated

NOTE: If a longer cable is required, please contact factory.

SPECIFICATIONS

Electrical:

The VTM is powered by the VorTek Transmitter using a factory provided cable.

Temperature Range:

- Operating: -4°F to +158°F (-20°C to +70°C)
- Storage: -22°F to 176°F (-30°C to +80°C)

Physical Construction:

Metal plate with a black powder coating.


Mounting:

Installs directly into a standard single-gang electrical box.

Configuration Port:


Easily accessible USB Mini Type B protected by removable rubber plug.

INSTALLATION

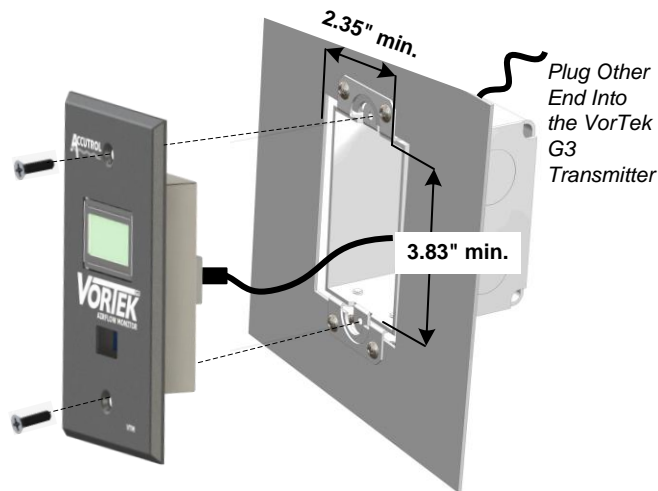

1. Feed the display cable thru the back of the electrical box.
2. Plug one end of the display cable into the RJ-45 connector located on the back of the VTM.
3. Plug the other end of the cable into the VorTek G3 Transmitter Display Port.
4. Secure the VTM to the electrical box using the two screws provided.

DIMENSIONS

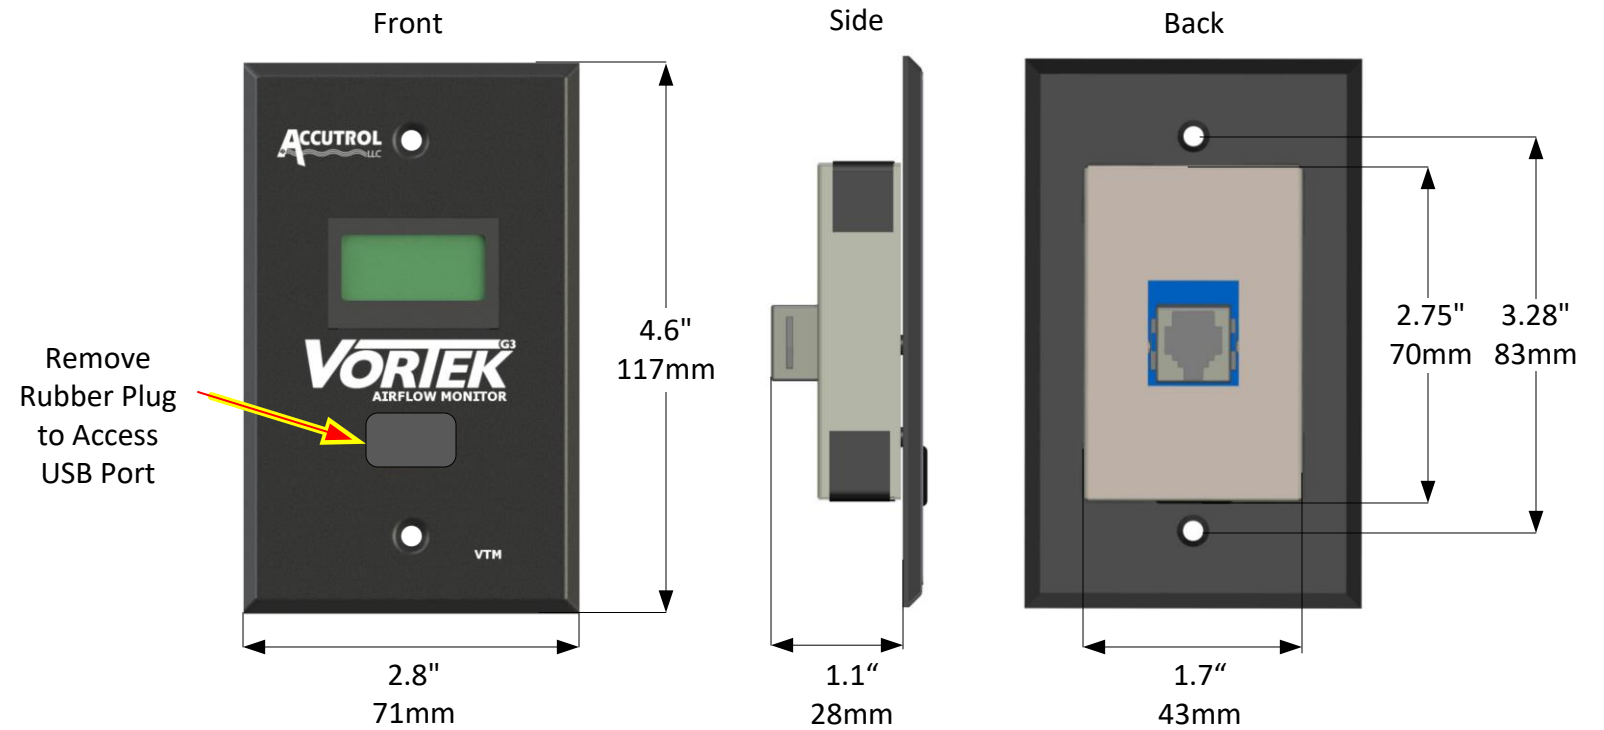


APPLICATION

Detail shown with standard transmitter enclosure

VorTek G3 Transmitter

Probe Located Inside Ductwork (2 x 2 configuration shown)

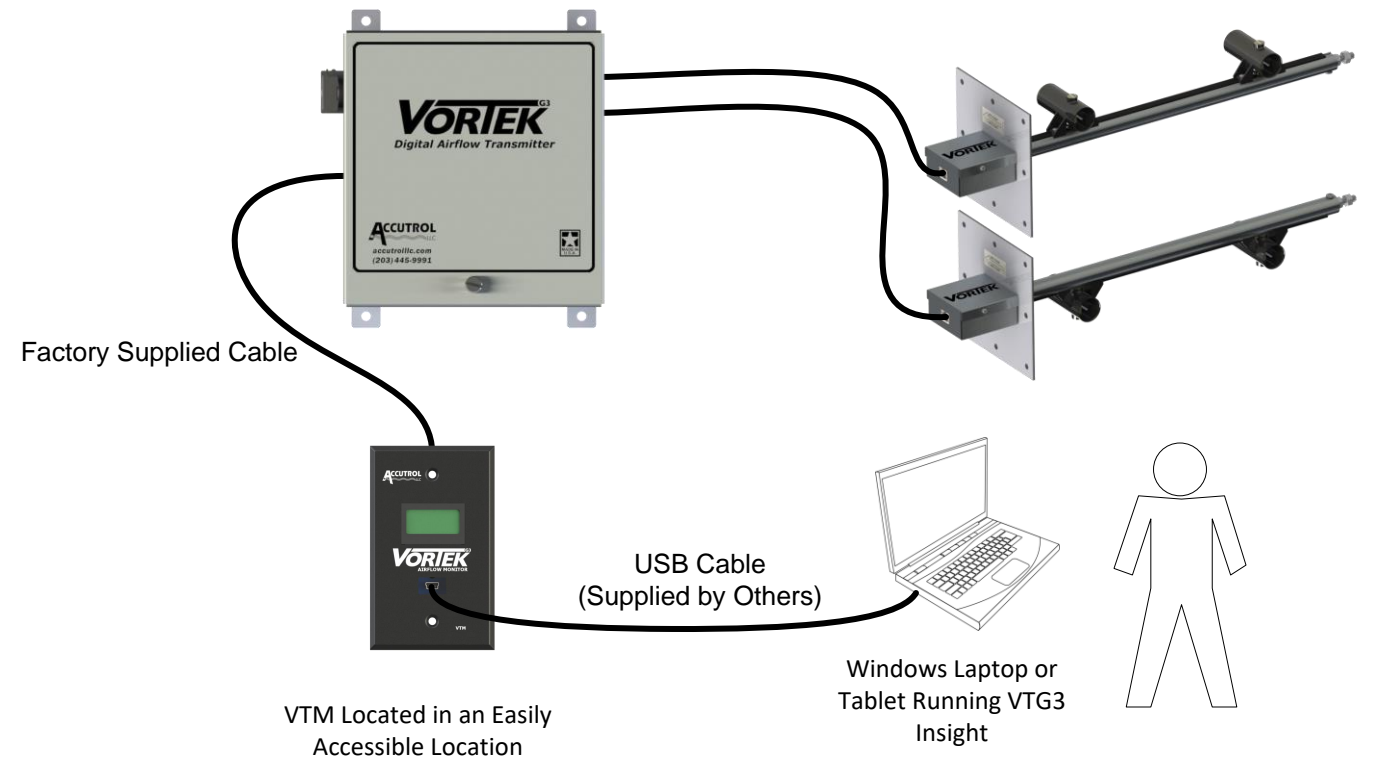

Accutrol Representative:

SUBMITTAL DRAWING

VTM

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE.
THIS DOCUMENT OR THE CONTENTS THEREOF SHALL NOT BE MODIFIED WITHOUT PRIOR WRITTEN PERMISSION BY ACCUTROL LLC.

DWG. NO:	VTM SUBMITTAL DWG		
REVISION:	B	ECN:	-
REV. DATE:	7-7-17	SHEET:	1 OF: 1